

DESIGN ENVELOPE

Intelligent Variable Speed pumps

SOLUTION OUTLINE



DESIGN ENVELOPE

OPTIMUM
PERFORMANCE
ANY GIVEN TIME



A

Armstrong Design Envelope pumps are a complete solution for heating, cooling and plumbing systems. The integration of a perfectly matched pump, motor and intelligent variable speed controller creates the highest value pumping solution.

Whether driven by social, environmental or fiscal responsibility, forward-thinking organizations must embrace energy-saving technologies and practices.

Through design advances,


Armstrong has eliminated the cost trade-offs that are frequently attached to sustainable choices. Design Envelope offers the lowest installed cost and the lowest life cost of any pumping solution today.



UP TO
65%
INSTALLED
COST
SAVINGS



UP TO
80%
ENERGY
SAVINGS

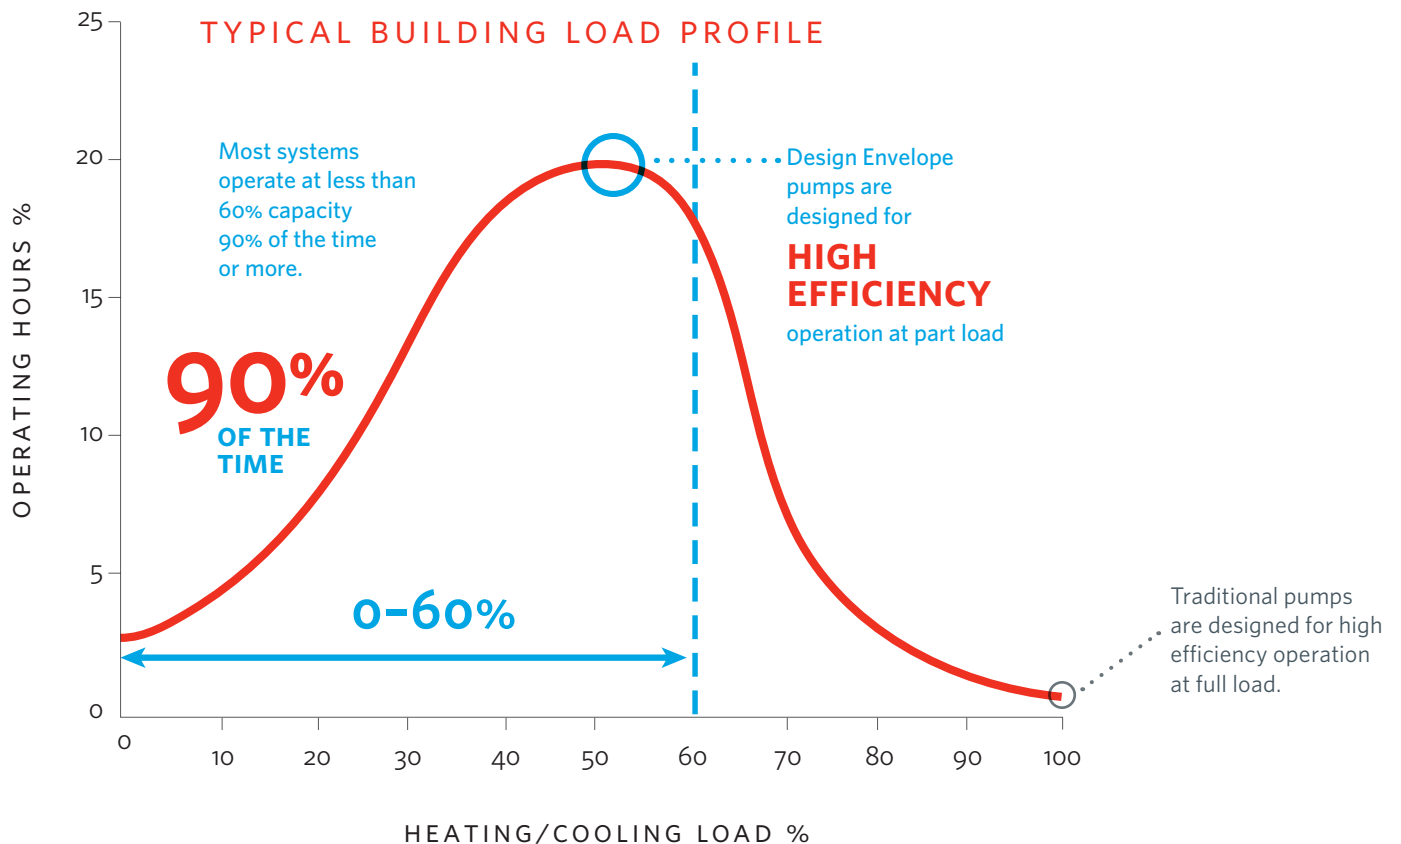

Design Envelope solutions reduce pumping costs through variable speed, demand-based operation — consuming only the energy required, based on current system demand.

Design Envelope pumps use a combination of optimized impeller size and speed control for energy efficient operation within a given perfor-

mance envelope. The performance envelopes are selected for the best pump efficiency where variable flow systems operate most often. This ensures a building's pumping system consumes as little energy as possible. It also ensures that the installation meets or exceeds ASHRAE 90.1 guidelines requiring 70% energy savings at 50% of peak load.

EVOLUTION OF PUMPING

& INSTALLED COSTS

DESIGN ENVELOPE TANGO/DUALARM

- > Managed redundancy and parallel operation replaces duty/standby
- > Reporting and proactive manage
- > Smaller units are easier to handle
- > Two rotating devices sharing casing
- > Optimized lifetime performance

DESIGN ENVELOPE VERTICAL IN-LINE

- > Integrated, sensorless variable speed controller
- > Eliminates wiring from vfd to pump and shaft grounding
- > Supports smaller motor selections
- > No feedback sensor or wiring required
- > Managed harmonics
- > No requirement for wall space
- > One-touch commissioning
- > Onboard Web services and connectivity

Saves an additional \$2000 on average

VERTICAL IN-LINE WITH VARIABLE SPEED CONTROL

- > Wall/rack mounted vfd
- > System feedback sensor
- > Partially reduces energy costs

VERTICAL IN-LINE SPLIT-COUPLING

- > **Eliminates the need for:** housekeeping pads, inertia base, flex connections, grouting and alignment
- > Reduced installation labor costs
- > Smaller mechanical room footprint (50-75%)

15 minute seal change: saves up to \$700

Saves over \$5000 for an 8" pump

BASE-MOUNTED END SUCTION

- > Legacy design
- > Base case for comparison
- > Time intensive seal change

AVERAGE ENERGY SAVINGS


VARIABLE SPEED PUMP
WALL-MOUNTED CONTROLLER/2-WAY VALVE

CONSTANT SPEED PUMP
3-WAY VALVE

VARIABLE SPEED PUMP
WITH CONTROLS DISABLED
(PUMP IN HAND)

- > Constant Speed operation
- > Base case for pump energy usage
- > Pump runs at design point, controlled by throttling

- > Constant reduced speed
- > Reduce motor speed in lieu of throttling flow

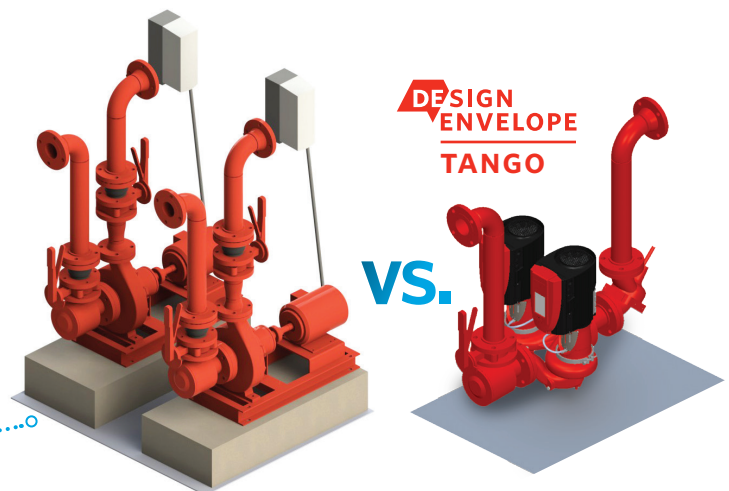

SUPERIOR PERFORMANCE

& ENERGY SAVINGS

UP TO
50%
ENERGY
SAVINGS

VARIABLE SPEED PUMP
WALL-MOUNTED
CONTROLLER/2-WAY VALVE

- > Sensor in mechanical room
- > Maintain constant design head
- > No savings if sensor stops working

UP TO
65%
ENERGY
SAVINGS

VARIABLE SPEED PUMP/
WALL-MOUNTED
CONTROLLER/2-WAY VALVE

- > Inefficient induction motor operation
- > Pump selected to design point
- > Sensor located at remote load
- > Maintain pressure at remote zone
- > No savings if sensor stops working

UP TO
70%+
ENERGY
SAVINGS

DESIGN ENVELOPE 3.1

- > Pump speed control through Sensorless technology
- > Detailed mapping of performance curve
- > Smaller motor selection on 25% of projects
- > Integrated controller — higher motor efficiency
- > Flow measurement accuracy of $\pm 5\%$
- > Optimized selection against load profile



UP TO
80%+
ENERGY
SAVINGS

DESIGN ENVELOPE
GENERATION 5
(1-10 HP)


- > Advanced digital controls
- > Control tuned to specific motor
- > iECM motor: IE5 efficiency rating
- > Advanced hydraulics

**NEXT
LEVEL
THINKING**

- > Multi-pump load sharing
- > Best-efficiency staging (Parallel Sensorless Pump Control)
- > Onboard diagnostics and trending
- > Real-time performance management


ENERGY SAVINGS

Armstrong Design Envelope variable speed technology fundamentally changes the operation of a pump within the larger HVAC system. The variable speed intelligence embedded in the Armstrong Design Envelope controller adjusts the pump operation to meet the immediate demand. The pump responds instantaneously and draws only the power required to meet that demand.

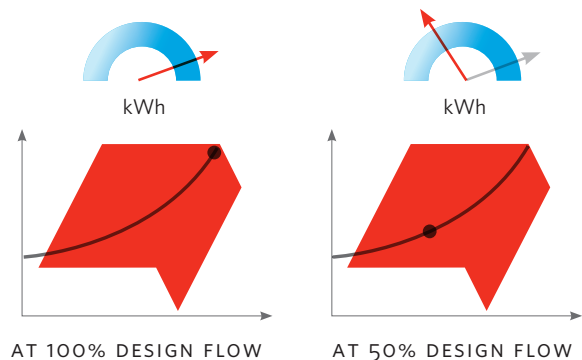

HOW IT

THE SENSOR WITHIN

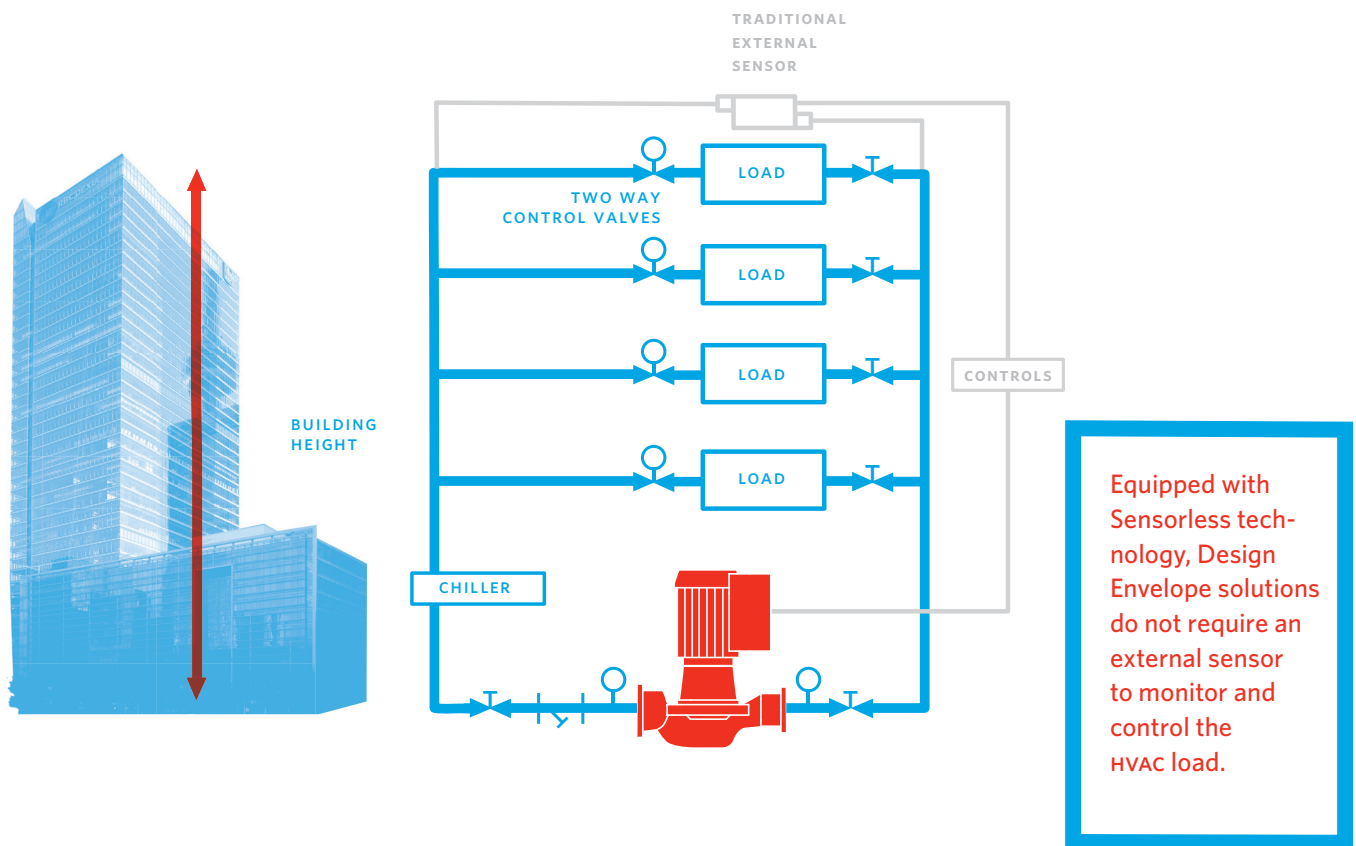


In a chilled water system, a building's temperature controls influence the local flow of control valves that modulate the flow to the cooling coils (load). As the control valves open for more chilled water flow, the differential pressure across the valve decreases.

The controller reacts to this change by increasing the pump speed. If the control valves close to reduce the chilled water flow, the differential pressure across the valve increases and the controller reduces the pump speed.

WORKS

MONITOR POWER & SPEED

CONTROL HEAD & FLOW

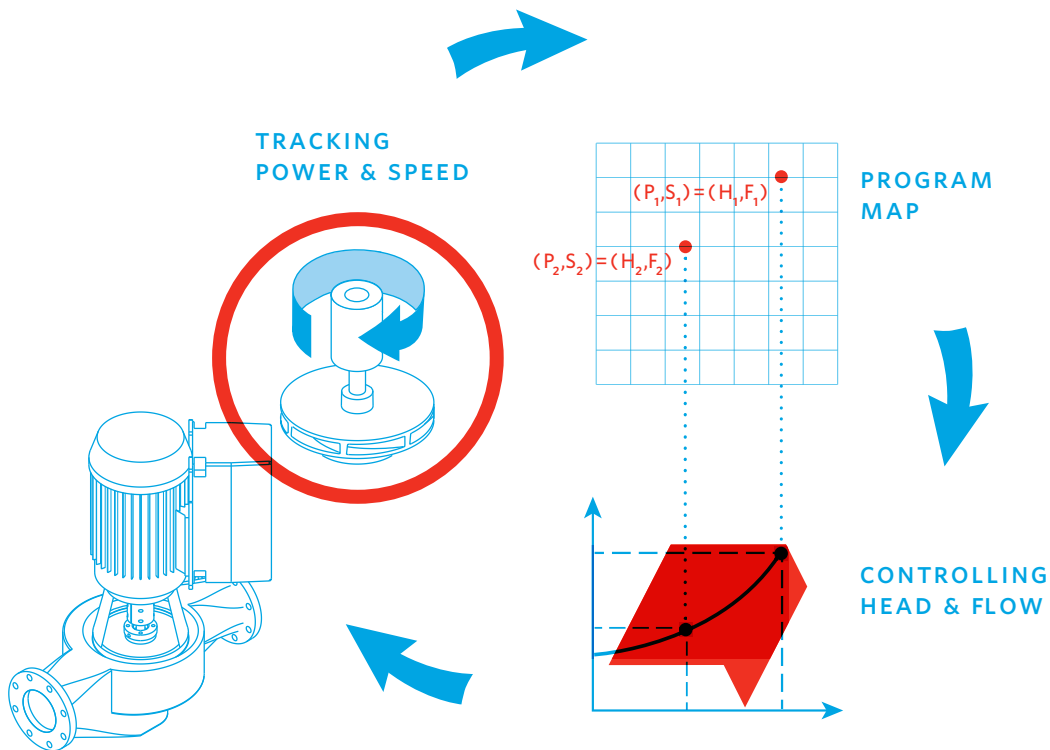

Equipped with Sensorless technology, a Design Envelope pump's performance characteristic curve (power draw and RPM) and operating curve are pre-programmed into the controller. During operation, the controller monitors the power and speed of the pump and establishes the hydraulic performance and position

of the pump's head-flow condition relative to the system requirements. As the building's control valves open or close to regulate flow to the cooling coils and maintain building occupant comfort, the Sensorless controller automatically adjusts the pump speed to match the required system pressure and flow.

LIVING

LOWEST OPERATING COST

UP TO 80% SAVINGS COMPARED TO
INDUSTRY STANDARD SOLUTIONS

Lowest maintenance costs of any pumping configuration

Extended high-efficiency performance

LOWEST INSTALLED COST

UP TO 65% SAVINGS COMPARED TO
INDUSTRY STANDARD SOLUTIONS

Smaller footprint

Reduced overall weight

Fewer connecting components

Reduced labour cost

Auto commissioning for immediate
maximum efficiency

LOWEST RISK

Maximum reliability

Maximum flexibility

Managed redundancy without duty/standby

EXTENDED PERFORMANCE


Pump Manager is a performance
management service to help operators
maintain optimized long-term efficiency.

- Early detection of changes in pump condition
- Notification of changes in equipment settings
- Insight into pump status, performance and efficiency
- Extended lifespan and optimum performance with Tango and DualArm configurations

**Parallel Sensorless Pump
Control (PSPC) is a technology
that minimizes the energy costs
of multi-pump installations
using best efficiency staging.**

Most multi-pump control systems stage pumps on the basis of capacity. The PSPC control logic draws on detailed mapping of pump efficiency curves to determine the best possible combination of pumps and operating speeds for any flow requirement.

When the PSPC calculates that a pump array would operate more efficiently with one more pump added to the current set of operating pumps, the control logic turns on one more pump and coordinates the operating speeds of all the operating pumps to share the load.

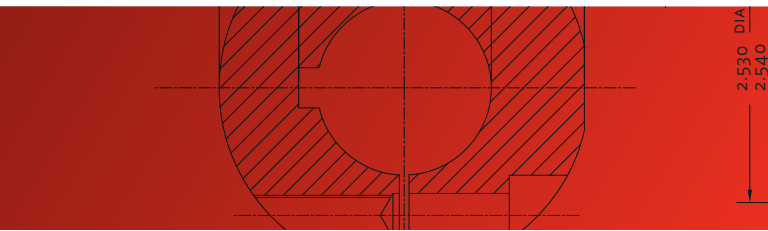

PERFORMANCE

Armstrong has re-invented and redesigned pumping solutions to include connectivity and performance management services. Design Envelope pumps deliver optimal lifetime efficiency through:

Expanded performance range and options

One-touch commissioning

Pump speed modulation based on an adjustable quadratic control curve for best part-load efficiency

Flow measurement accuracy (+/- 5%)

On-board data and diagnostics to provide performance information and notifications

PUMP MANAGER



ARMSTRONG

- Flow: 67.8 GPM
- Head: 66.55 FT
- Speed: 2880 RPM
- Power: 2.54 kW
- Voltage: 333.6 V
- Current: 5.16 A

Auto

Pump Tag: CHW P12

ARMSTRONG

Pump Configuration

- Pump Control
- Auto Flow Balancing
- Frequency Adjust
- Purchased Services
- Dual Season Setup



PERFORMANCE PACKAGES

FUNCTIONS INCLUDED



Sensorless Bundle (standard)

- Sensorless control
- Flow readout
- Constant flow
- Constant pressure



Parallel Sensorless (standard on Tango and dualARMs)

- Parallel Sensorless control



Energy Performance Bundle (requires Sensorless Bundle)

- Auto-flow balancing
- Maximum flow control



Protection Bundle (requires Sensorless Bundle)

- Minimum flow control
- Bypass valve control



Zone optimization

- Accept up to two dP sensor control signals



Dual-season setup

- Pre-set heating and cooling parameters for two-pipe systems

CONNECTIVITY

Built-in Wi-Fi capability supports remote control, real-time monitoring and management for lowest operating costs

Local and remote access from any smart device

Adaptive browser-compatible software and intuitive user interface

INDUSTRY-LEADING

DESIGN ENVELOPE

Design Envelope technology offers advanced HVAC performance management, the simplest and fastest commissioning and optimized lifetime performance through real-time insight and action.



HIGHEST
ENERGY EFFICIENCY



LOWEST
INSTALLED
COST



LOWEST
OPERATING COST



LOWEST
ENVIRONMENTAL
COST



LOWEST
PROJECT
& OPERATING RISK

CAPABILITIES

Extended intelligence: integrated controller provides on-board diagnostics, trending, alerts, automatic flow-balancing and optional Parallel Sensorless pump control

Advanced controls: colour touchpad with intuitive HMI and access to real-time performance and pump conditions

Real-time connectivity: options include BACnet, BACnet IP, and Modbus. Built-in Wi-Fi and wired connectivity supports web-based control or local control from a handheld unit

Armstrong intelligent motors: with integrated controls deliver IE5 levels of energy efficiency (on select models) and lowest energy consumption

VALUE

BUILDING OWNERS

- Lowest operating costs over the life of the pumps
- Additional capacity provides future proofing against changing building loads
- Unmatched space savings, efficiency and redundancy with Tango and DualArm multi-pump configurations









DESIGN ENGINEERS

- Broad range of performance leads to reduced iterations of pump selection and reduced performance risk
- UL STD 778 and CSA STD C22.2 No.108 certified

CONTRACTORS

- Easy installation and commissioning
- Express models available for quick delivery
- Single source accountability for all aspects of an integrated pumping solution

DESIGN ENVELOPE PUMP RANGE*

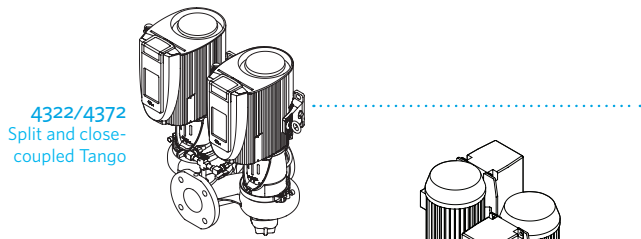

INDOOR	OUTDOOR
1 hp - 10hp	1-10hp

Express models available 

INDOOR	OUTDOOR
1-100hp	1-100hp

INDOOR	OUTDOOR
1-40hp	1-40hp

INDOOR	OUTDOOR
1-7½hp	1-7½hp

INDOOR	OUTDOOR
1 hp - 450hp	1-125hp

Standalone 450hp - 1250hp

Express models available 

INDOOR	OUTDOOR
1-10hp	1-10hp

Express models available 

INDOOR	OUTDOOR
1-125hp	N/A

Express models available 

INDOOR	OUTDOOR
1-7½hp	N/A

Express models available 

* Single phase available to 7½hp / 5½kW

OUTDOOR APPLICATIONS

- Rated for UL type 4X with TEFC motor standard.
- Epoxy coated controller electronics protect against condensation.
- Stainless steel backplate prevents corrosion between the backplate and the heat sink.
- Stainless steel overhead weather shield protects the keypad from UV rays, prevents overheating due to sun exposure, and prevents accumulation of ice on sensitive areas.

TORONTO

23 BERTRAND AVENUE
TORONTO, ONTARIO
CANADA
M1L 2P3
+1 416 755 2291

BUFFALO

93 EAST AVENUE
NORTH TONAWANDA, NEW YORK
U.S.A.
14120-6594
+1 716 693 8813

BIRMINGHAM

HEYWOOD WHARF, MUCKLOW HILL
HALESOWEN, WEST MIDLANDS
UNITED KINGDOM
B62 8DJ
+44 (0) 8444 145 145

MANCHESTER

WOLVERTON STREET
MANCHESTER
UNITED KINGDOM
M11 2ET
+44 (0) 8444 145 145

BANGALORE

#59, FIRST FLOOR, 3RD MAIN
MARGOSA ROAD, MALLESWARAM
BANGALORE, INDIA
560 003
+91 (0) 80 4906 3555

SHANGHAI


NO. 1619 HU HANG ROAD, XI DU TOWNSHIP
FENG XIAN DISTRICT, SHANGHAI
P.R.C.
201401
+86 21 3756 6696

SÃO PAULO

RUA JOSÉ SEMIÃO RODRIGUES AGOSTINHO,
1370 GALPÃO 6
EMBU DAS ARTES
SAO PAULO, BRAZIL
+55 11 4781 5500

ARMSTRONG FLUID TECHNOLOGY
ESTABLISHED 1934

ARMSTRONGFLUIDTECHNOLOGY.COM

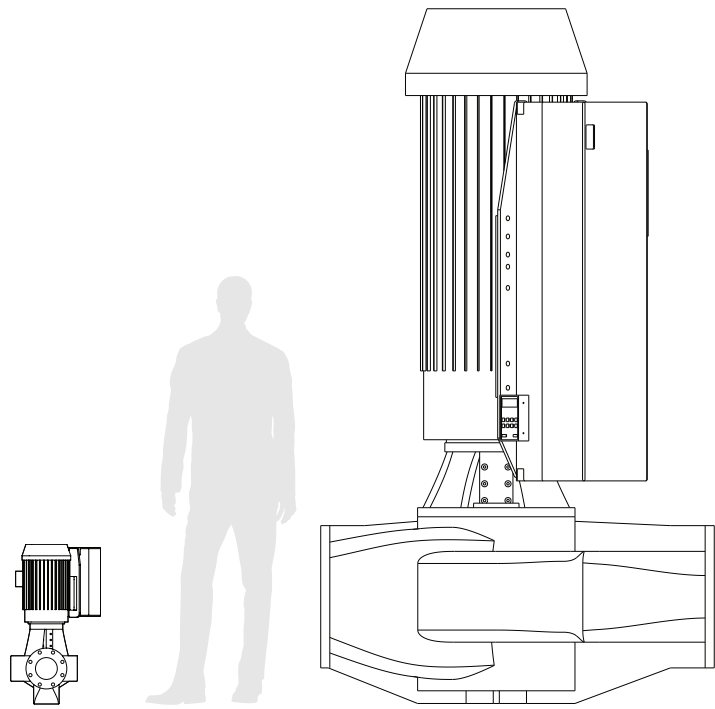

1 hp

450 hp

Contact us at:

+1 416 755 2291

ArmstrongFluidTechnology.com/DE

View your savings and ROI
using real data from your
installation. Ask your
Armstrong representative.

MAKE ENERGY SENSE™