

Series PiB 4360 Close Coupled Vertical-In-line Pumps

SUBMITTAL

JOB: _____	REPRESENTATIVE: _____
ENGINEER: _____	ORDER NO: _____ DATE: _____
CONTRACTOR: _____	SUBMITTED BY: _____ DATE: _____
	APPROVED BY: _____ DATE: _____

PUMP DESIGN DATA	
PUMP MODEL:	QUANTITY REQUIRED:
CAPACITY: USgpm (l/s)	HEAD: ft. (m)
LIQUID:	TEMPERATURE: °F (°C)
MAXIMUM WORKING PRESSURE: 175 psig (12 BAR)	
MAXIMUM OPERATING TEMPERATURE: 225°F (107°C)	
NPT END CONNECTIONS (COMPANION FLANGES INCLUDED)	


MATERIALS OF CONSTRUCTION	
CASING	CAST IRON
COMPANION FLANGES	CAST IRON
MOTOR/PUMP BRACKET	CAST IRON
IMPELLER	BRONZE
MOTOR SHAFT	CARBON STEEL
STUB SHAFT (4360 B)	STAINLESS STEEL
SHAFT SLEEVE (4360 D)	BRONZE

ADDITIONAL NOTES

MOTOR DESIGN DATA	
FREQUENCY	60 HERTZ
VOLTAGE	SEE BELOW
EFFICIENCY	STD (4360B) ENERGY EFFICIENT NEMA 12.11 (4360D)
ENCLOSURE	ODP (4360B) TEFC (4360D)

MECHANICAL SEAL DESIGN DATA	
STYLE	INSIDE SINGLE SPRING
TYPE	ARMSTRONG 2A
ROTATING FACE	CARBON
STATIONARY FACE	CERAMIC (4360B) SILICON-CARBIDE (4360D)
SECONDARY SEAL	BUNA-N (4360B) EPDM * (4360D)
SPRINGS	STAINLESS STEEL
ROTATING HARDWARE	STAINLESS STEEL

* NOT SUITABLE FOR USE ON OIL SERVICE

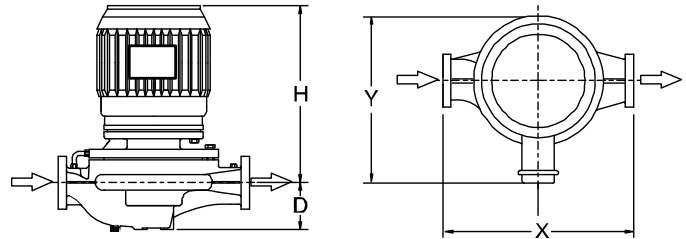


MODEL	CURVE	CONNECTIONS	MOTOR			IMPELLER DIAMETER	DIMENSIONS				ASSEMBLY WEIGHT
			HP	PHASE & VOLTAGE	RPM		X*	Y	H	D	
4360B-1505T-0.5/4	04B	1.50	0.50	1 Phase 115/230 Volt	1800	5.16	11.63 (295)	8.75 (222)	12.75 (324)	3.56 (90)	43 (19.5)
4360B-2205T-0.5/4	06B	2.00	0.50		1800	4.56	11.75 (298)	8.75 (222)	13.13 (333)	3.56 (90)	49 (22.2)
4360B-1205T-1.5/2	02B	1.25	1.50	3 Phase 208-230/460 Volt or 575 Volt	3600	4.41	11.50 (292)	8.75 (222)	12.75 (324)	3.56 (90)	42 (19.0)
4360B-1205T-2.0/2	02D	1.25	2.00		3600	4.81	11.50 (292)	8.75 (222)	13.13 (333)	3.56 (90)	47 (21.3)
4360B-1505T-3.0/2	04F	1.50	3.00		3600	4.78	11.63 (295)	8.88 (225)	12.75 (324)	3.50 (89)	58 (26.3)
4360B-2205T-0.7/4	06D	2.00	0.75		1800	5.05	11.75 (298)	8.88 (225)	12.75 (324)	3.50 (89)	51 (23.1)
4360D-1507T-1.0/4	08D	1.50	1.00		1800	6.25	13.50 (343)	10.75 (273)	13.75 (349)	3.25 (83)	110 (49.9)
4360D-1507T-1.5/4	08F	1.50	1.50		1800	7.00	13.50 (343)	10.75 (273)	14.75 (375)	3.25 (83)	115 (52.2)
4360D-2207T-2.0/4	10D	2.00	2.00		1800	6.89	14.00 (356)	11.13 (283)	14.75 (375)	3.50 (89)	120 (54.4)
4360D-3307T-1.5/4	12B	3.00	1.50		1800	6.02	18.00 (457)	13.13 (333)	14.81 (376)	4.50 (114)	130 (59.0)

Note : All dimensions are in inches (mm) and weights in lbs (kg).
For exact installation data please write factory for certified dimensions.
* Dimension does not include companion flanges.

ARMSTRONG



PERFORMANCE CURVES

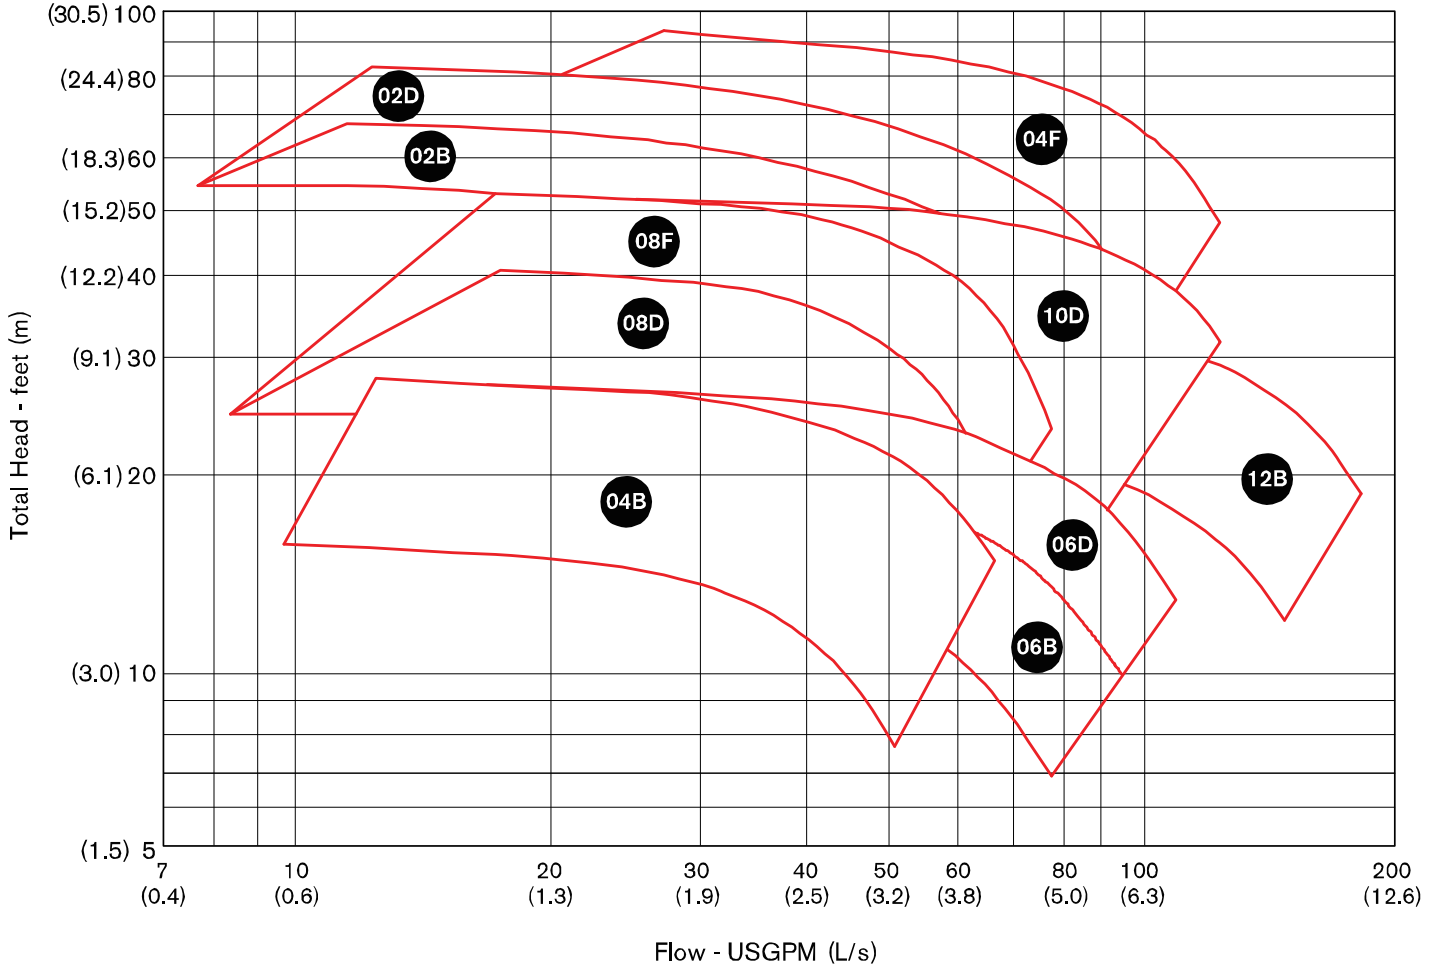

CURVE	MODEL	CURVE	MODEL
02B	4360B-1205T-1.5/2	06D	4360B-2205T-0.7/4
02D	4360B-1205T-2.0/2	08D	4360D-1507T-1.0/4
04B	4360B-1505T-0.5/4	08F	4360D-1507T-1.5/4
04F	4360B-1505T-3.0/2	10D	4360D-2207T-2.0/4
06B	4360B-2205T-0.5/4	12B	4360D-3307T-1.5/4

S. A. Armstrong Limited
 23 Bertrand Avenue
 Toronto, Ontario
 Canada, M1L 2P3
 T: 416-755-2291
 F: 416-759-9101

Armstrong Pumps Inc.
 93 East Avenue
 North Tonawanda, New York
 U.S.A. 14120-6594
 T: 716-693-8813
 F: 716-693-8970

Armstrong Holden Brooke Pullen
 Wenlock Way
 Manchester
 United Kingdom, M12 5JL
 T: +44 (0) 161 223 2223
 F: +44 (0) 161 220 9660



© S.A. Armstrong Limited 2010