

SERIES H | STANDARD CIRCULATORS | SUBMITTAL

File No: 10.51
 Date: JUNE 03, 2015
 Supersedes: 10.51
 Date: DECEMBER 17, 2013

Job: _____ Representative: _____
 _____ Ordered by: _____ Date: _____
 Engineer: _____ Submitted by: _____ Date: _____
 Contractor: _____ Approved by: _____ Date: _____

PUMP DESIGN DATA

Pump model: _____ Flange size: _____
 No. of pumps: _____ Note: _____
 Capacity: _____ USgpm (L/s) Head: _____ ft (m)
 Temperature: _____ °F (°C) Liquid: _____
 Companion flanges: Included

MAXIMUM PUMP OPERATING CONDITIONS

175 psig at 225°F (1206 kPa at 107°C)

OPTIONAL EQUIPMENT

MATERIALS OF CONSTRUCTION

PART NAME	H-32 TO H-54 BRONZE FITTED	H-63 TO H-68 BRONZE FITTED	H-32 TO H-54 LEAD FREE BRONZE*	H-63 TO H-68 LEAD FREE BRONZE*
Pump Body	Cast iron	Cast iron	Lead free bronze	Lead free bronze
Coupler	H-32 & H-41 flexible, 4-spring H-51 to H-54 flexible, spacer type	Flexible, spacer type	H-32 & H-41 flexible, 4-spring H-51 to H-54 flexible, spacer type	Flexible, spacer type

Impeller: Non-ferrous

Bearings: Sleeve - Oil lubricated**
 'Maintenance free' bearings - No lubrication***

Seal: Mechanical


Stationary seal face: Sintered silicon carbide

* Contains less than 0.25% lead, weighted average.

** Alloy shaft with copper sleeve.

*** Stainless steel shaft.

PERFORMANCE CURVE

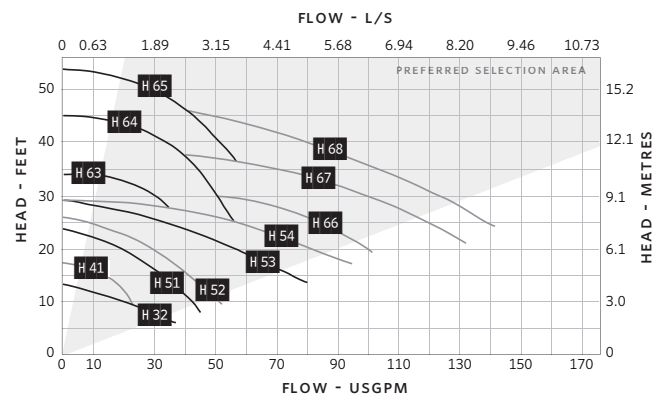

Based on 1800 RPM, 60 Hz motors.
 For 50 Hz motors write for special capacity charts.


MODEL	FLANGE SIZE (N.P.T)	MOTOR [†]		DIMENSIONS inches (mm)				WEIGHT lbs (kg)
		HP	PHASE AND VOLT	A	B	C	D	
H32	1	1/6	1 phase 115 V	15.00 (381)	8.50 (216)	12.50 (318)	0.88 (22)	33 (15.0)
H32	1 1/4	1/6		15.00 (381)	8.50 (216)	12.50 (318)	0.88 (22)	33 (15.0)
H32	1 1/2	1/6		15.00 (381)	8.50 (216)	12.50 (318)	0.88 (22)	33 (15.0)
H41	1	1/6	1 phase 115 V or 3 phase 208/230/460 V	15.25 (387)	8.50 (216)	12.50 (318)	0.75 (19)	33 (15.0)
H51	1	1/4		17.25 (438)	11.50 (292)	13.50 (343)	0.75 (19)	53 (24.0)
H52	1 1/4	1/3	17.25 (438)	11.50 (292)	13.50 (343)	0.88 (22)	54 (24.0)	
H53	1 1/2	1/2	1 phase 115/230 V or 3 phase 208/230/460 or 575 V	20.00 (508)	11.50 (292)	16.50 (419)	0.88 (22)	64 (29.0)
H54	2	3/4		20.00 (508)	11.50 (292)	16.50 (419)	0.88 (22)	71 (32.0)
H63	1 1/2	1/2		23.00 (584)	13.50 (343)	19.75 (502)	0.88 (22)	96 (44.0)
H64	1 1/2	3/4		23.00 (584)	13.50 (343)	19.75(502)	0.88 (22)	100 (45.0)
H65	1 1/2	1		23.00 (584)	13.50 (343)	19.75(502)	0.88 (22)	102 (46.0)
H66	2	3/4		23.25 (591)	14.00 (356)	19.75 (502)	0.88 (22)	120 (54.0)
H67	2	1		23.25 (591)	14.00 (356)	19.75 (502)	0.88 (22)	125 (57.0)
H68	2	1 1/2	3 phase 208/230/460 or 575 V	21.75 (552)	14.00 (356)	18.25 (464)	0.88 (22)	130 (59.0)

Dimensions shown are for reference only. For exact dimensional data, contact factory.

[†]All single phase motors are equipped with a built-in thermal overload protection.

Three phase motors require external overload protection.

Conduit box not supplied on 1/2 hp or greater.

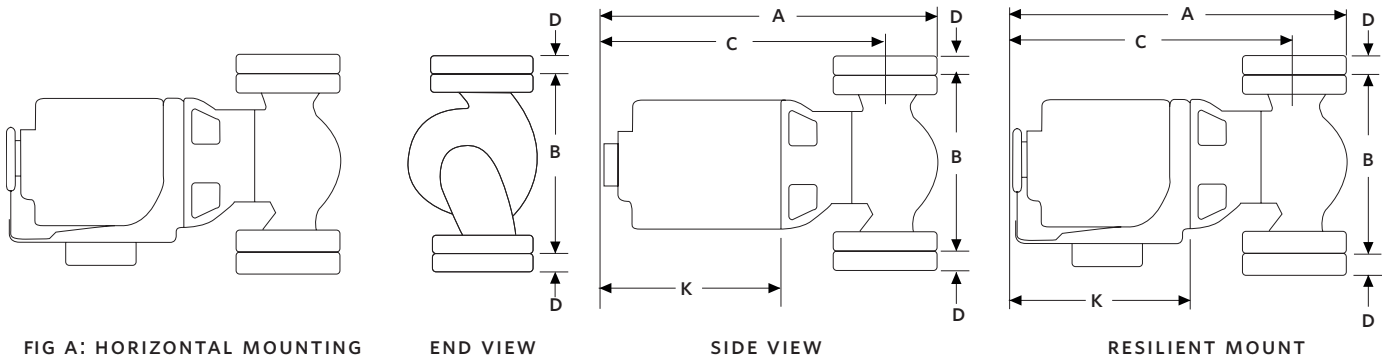

TORONTO
+1 416 755 2291

BUFFALO
+1 716 693 8813

BIRMINGHAM
+44 (0) 8444 145 145

MANCHESTER
+44 (0) 8444 145 145

BANGALORE
+91 (0) 80 4906 3555

SHANGHAI
+86 21 3756 6696