

Model 009-IFC® Cartridge Circulator

The High Velocity series Taco 009-IFC cartridge circulator includes an Integral Flow Check (IFC®). The removable IFC replaces a separate in-line flow check, saving installation costs while improving system performance. Available in Cast Iron or Stainless Steel construction.



Low-Lead
Compliant

Submittal Data Information Model 009-IFC® Cartridge Circulator

Submittal Data # 101-099
Supersedes: 01/12/15

Effective: 11/24/15

Features

- Integral Flow Check (IFC®)
 - Prevents gravity flow
 - Eliminates separate in-line flow check
 - Reduces installed cost, easy to service
 - Improved performance vs. In-line flow checks
- Unique replaceable cartridge-Field serviceable
- Unmatched reliability-Maintenance free
- Quiet, efficient operation
- Direct drive - Low power consumption
- Self lubricating, No mechanical seal
- Standard high capacity output - Compact design
- Wide range of applications
- Cast Iron or Stainless Steel construction, Flanged connections

Materials of Construction

Casing (Volute): Cast Iron or Stainless Steel
Integral Flow Check:
Body, Plunger....Acetal
O-ring Seals.....EPDM
Spring.....Stainless Steel
Stator Housing: Aluminum
Cartridge: Stainless Steel
Impeller: Non-Metallic
Shaft: Ceramic
Bearings: Carbon
O-Ring & Gaskets: EPDM


Model Nomenclature

F – Cast Iron, Flanged
SF – Stainless Steel, Flanged
IFC – Integral Flow Check

Performance Data

Max.Flow: 10 GPM
Max. Head: 35 Feet
Minimum Fluid Temperature: 40°F (4°C)
Maximum Fluid Temperature: 230°F (110°C)
Maximum Working Pressure: 150 psi
Connection Sizes: 3/4", 1", 1-1/4", 1-1/2" Flanged

Certifications & Listings

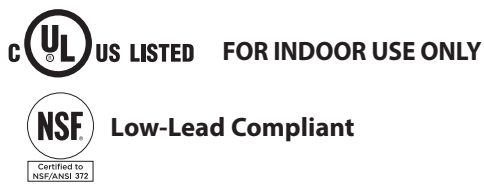


Application


The Taco 009-IFC with Integral Flow Check (IFC®) is designed to reduce installation costs when zoning with 00® circulators on a wide range of residential and light commercial higher-head/lower-flow water circulating applications. Typical uses include hydronic heating, radiant in-floor/panel heating and closed-loop solar heating systems. The Stainless Steel 009-IFC should be used in higher-head/lower-flow heat recovery, open-loop solar heating and light commercial domestic water recirculation systems. The unique replaceable cartridge contains all of the moving parts and allows for easy service instead of replacing the entire circulator.

Pump Dimensions & Weights

Models	Casing	A		B		C		D		F		G		Ship Wt.	
		in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	lbs.	Kg
009-F5-IFC	Cast Iron	7	178	5-11/16	144	3-3/16	81	3-3/8	86	5-1/2	140	6-3/8	162	9.5	4.3
009-SF5-IFC	St. Steel	7	178	5-11/16	144	3-3/16	81	3-3/8	86	5-1/2	140	6-3/8	162	9.5	4.3

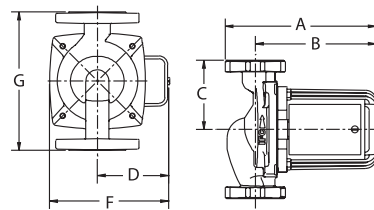


Mounting Positions

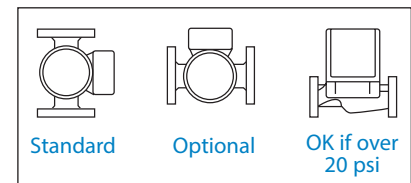

Electrical Data

Model	Volts	Hz	Ph	Amps	RPM	HP
009-F5-IFC	115	60	1	1.40	3250	1/8
009-SF5-IFC	115	60	1	1.40	3250	1/8
Motor Type	Permanent Split Capacitor Impedance Protected					
Motor Options	220/50/1, 220/60/1, 230/60/1, 100/110/50/60/1					

Flange Orientation



Performance Field - 60Hz

