

SUPERSEDES: September 5, 2015

EFFECTIVE: March 8, 2016

Job: _____

ITEM	LOCATION	MODEL	QUANTITY	GALLONS
------	----------	-------	----------	---------

SPECIFICATIONS

- Designed and constructed per ASME Code Section VIII Div. 1
- Registered with the National Board of Pressure Vessel Manufacturers
- Standard Design Pressure and Temperature: 150 psi @ 240°F
- Particle removal down to 5 microns
- Construction: Carbon Steel with exterior red oxide primer finish
- 304 Stainless Steel Coalescence Pall Rings


CAUTION: LIFTING LUGS FOR RIGGING AND LIFTING USE ONLY, NOT FOR ANCHORING OR HANGING.

FACTORY INSTALLED

- Air Vent is suitable for water, max. 50% glycol
- Blowdown Valve
- Flush Valve

OPTIONS

- Higher Design Pressures and Temperatures-Consult factory
- Base Ring
Standard on (4918 thru 4936))

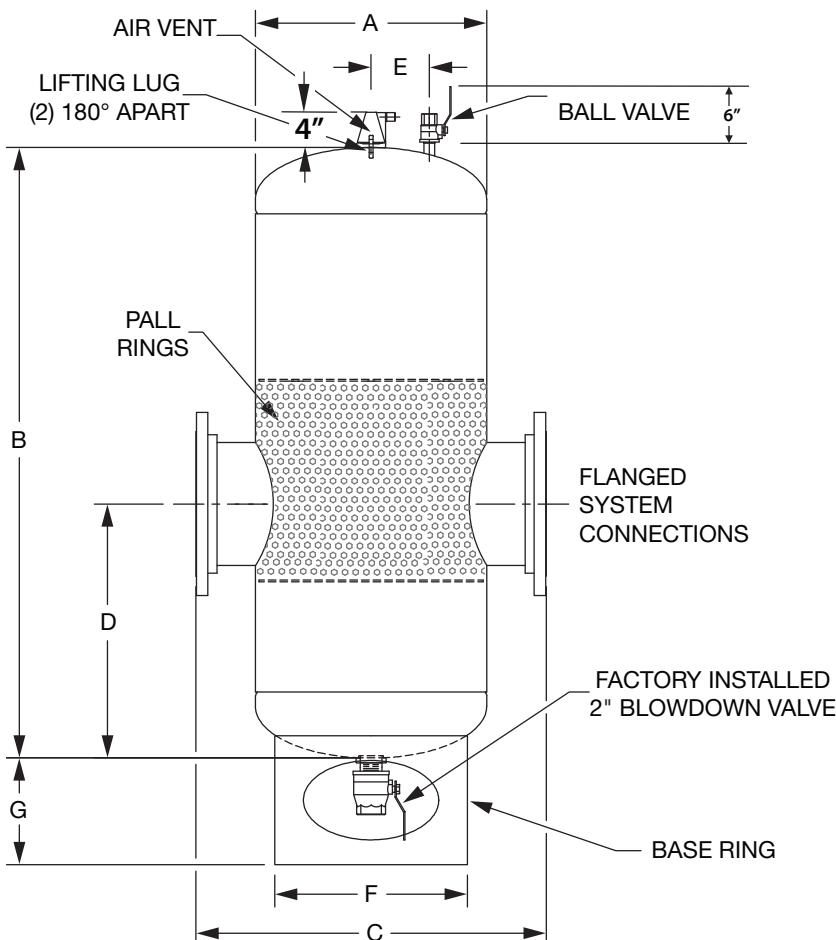

SIZES & DIMENSIONS

All dimensions shown are subject to change and should not be used for prepping. Contact your local Taco representative should certified dimensional drawings be required.



PIPE SIZE	MODEL NUMBER	A DIA. (INCH)	B MAX. (INCH)	C (INCH)	D (INCH)	E (INCH)	F DIA. (INCH)	G (INCH)	FLOW @ 2 PSI P.D.	APPROX. WEIGHT (LBS.)
18	4918AD-150	36	91	48	42 ¹ / ₄	9	30	13 ¹ / ₂	3673	1650
20	4920AD-150	42	100	54	45 ³ / ₄	10 ¹ / ₂	38	12 ³ / ₄	4561	2410
22	4922AD-150	48	109	60	51 ¹¹ / ₁₆	12	44	12 ⁵ / ₈	5300	3190
24	4924AD-150	48	118	60	53 ¹ / ₂	12	44	12 ⁵ / ₈	6346	3360
26	4926AD-150	54	127	67	57 ¹¹ / ₁₆	13 ¹ / ₂	50	13 ¹ / ₈	7647	4620
30	4930AD-150	60	145	74	62 ¹ / ₂	15	54	14	10262	7050
36	4936AD-150	72	172	90	76 ⁵ / ₁₆	15	66	15 ³ / ₄	14905	12030

COMMENTS: _____

