

Quick Start Guide

102-478

FloodBreaker®

SUPERSEDES: April 1, 2012


Plant ID No. 001-4096

FloodBreaker[®] is shipped with the vacation leak protection active. It must be de-activated for the standard leak protection to be active.

If the FloodBreaker is only powered by batteries press any key to wake up the display.

To unlock the menu, press and hold the up \triangle and down \bigtriangledown buttons simultaneously until you hear a beep and the display begins to flash. The menu is now unlocked.

1. Scroll through the menu until you reach LE.

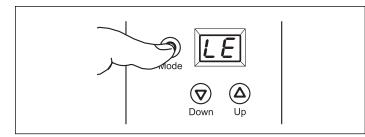

Press it once more to reach the current standard leak setting. Using the \triangle or \bigtriangledown buttons adjust the FloodBreaker to the desired setting. Hit the mode button Once more to save the setting. See Table 1 for code key.

Table 1	
LE Standard Protection Settings	Approximate Gallons
	Deactivated
1	25
2	55
3	80
4	105
5	130
6	160
7	185
8	210
9	240
10	265
11	290
12	315
13	345
14	370
15	395

The standard leak protection setting will vary for each home and **may need to be adjusted** in order to optimize your protection. EFFECTIVE: August 26, 2015


To determine your initial setting, determine what usage of water or appliance outlet has the highest continuous flow of water and calculate the usage. Example: a shower with a flow of 1.5 GPM being used for 30 minutes would use 45 gallons (30 minutes x 1.5 gallons = 45 gallons). Set the Standard Leak Protection setting accordingly.

2. Resetting the FloodBreaker.


To reset the FloodBreaker after it has shut-off the water, press the mode button (O). The FloodBreaker will open and resume monitoring all of the original settings. Be sure to fix any leak before resetting the FloodBreaker.

3. For Standard Leak Protection to be active you must de-activate the Vacation Leak Protection.

Unlock the menu and scroll through it until you reach UL.

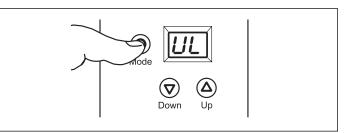

Press it once more to reach the current vacation leak setting. Using the \triangle button, adjust the FloodBreaker to the de-active setting (--).

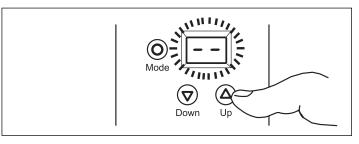

Hit the mode button Oonce more to save the setting.

Congratulations your Standard Leak Protection is now active! Be sure to read the complete instructions to take full advantage of all of the protection features your new FloodBreaker has to offer.