


### TB10T Brazed Plate Heat Exchanger

The TB10T delivers efficient heat exchange solutions across a wide capacity interval, and is quick and simple to adapt for a number of applications. The product's compact size, versatility, and excellent heat transfer make it a perfect choice for both single-phase and refrigerant applications.



# TB10T Heat Exchanger

## Available connections\*

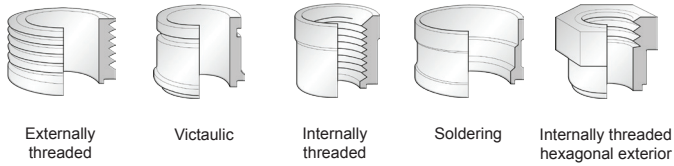


\*For specific dimensions, or information about other types of connections, please contact your Taco sales representative.

## Pressure classes

- S** Standard, evaluated per EN 13345 (25-38 bar/ 363-550 PSI).
- M** Medium, evaluated per EN 13345 (38-48 bar/550-696 PSI).
- H** High, evaluated per EN 13345 (42-56 bar/609-812 PSI).





Max number of plates (NoP)	140
Port size F1/P1	24 mm (0.945 in)
Port size F2/P2	24 mm (0.945 in)
Port size F3/P3	24 mm (0.945 in)
Port size F4/P4	24 mm (0.945 in)
Max volume flow	9 m <sup>3</sup> /h (39.6 gpm)

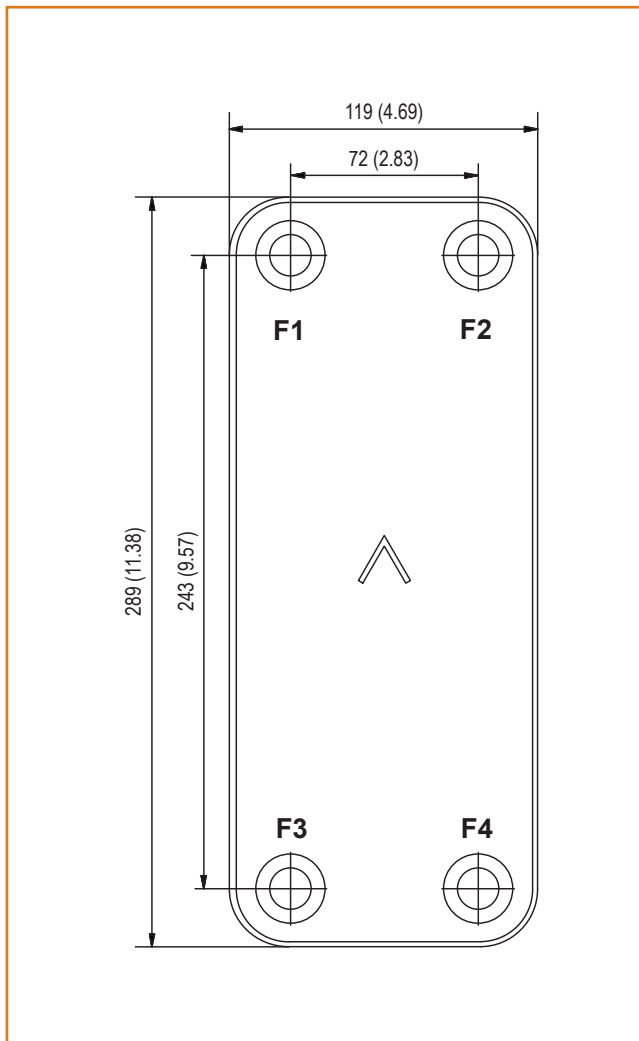

Materials	Channel plate	Brazing
SC	Stainless steel	Copper
NC	Stainless steel	Copper
SN	Stainless steel	Nickel
SPS	Stainless steel	Stainless steel
SPF	Stainless steel	Stainless steel

Size	Height of plate pack	Total weight
SC M SC S NC S	4+(2,24×NoP) mm	1,15+(0,096×NoP) kg
	0.157+(0,088×NoP) in	2.54+(0.212×NoP) lb
SC H	8+(2,24×NoP) mm	2,1+(0,096×NoP) kg
	0.315+(0.088×NoP) in	4.63+(0.212×NoP) lb
SPF S	4+(2,27×NoP) mm	1,16+(0,086×NoP) kg
	0.157+(0.089×NoP) in	2.55+(0.189×NoP) lb
SPS M	4+(2,24×NoP) mm	1,24+(0,096×NoP) kg
	0.157+(0.088×NoP) in	2.73+(0.212×NoP) lb
SN S	4+(2,27×NoP) mm	1,17+(0,086×NoP) k
	0.157+(0.089×NoP) in	2.59+(0.212×NoP) lb

# TB10T Performance Curves

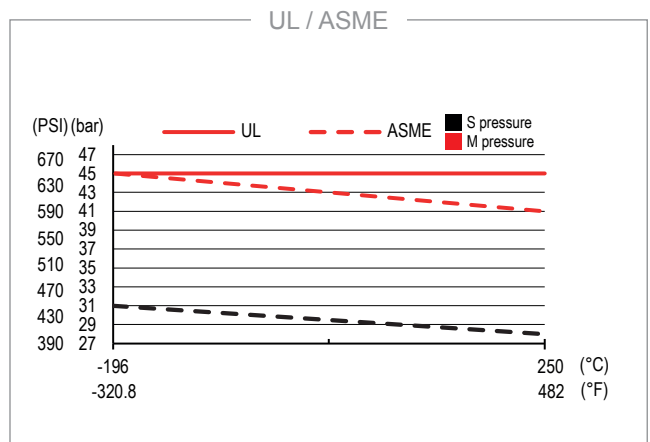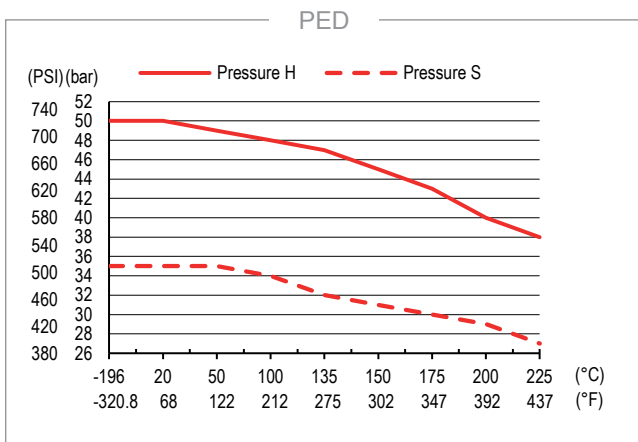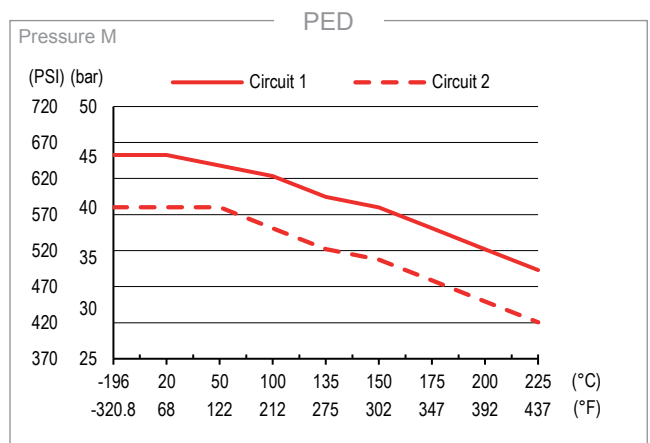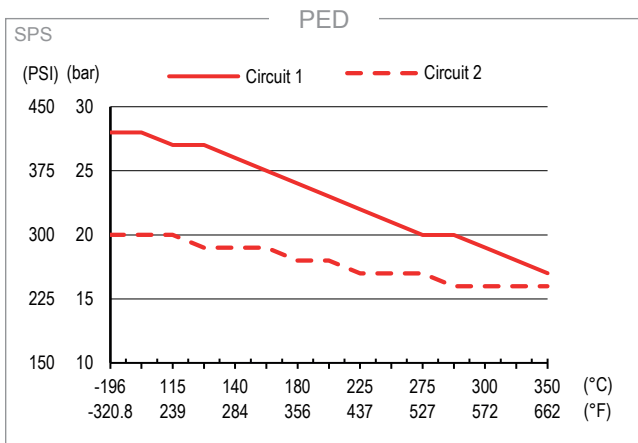

### Third party approvals

Taco BPHEs are generally approved by listed certification organizations:

**Europe, Pressure Equipment Directive (PED)**


**America, Underwriters Laboratories Inc (UL)**

**Japan, Kouatsu-Gas Hoan Kyoukai (KHK)**

Additionally Taco holds approvals from a vast variety of other certification organizations. For approval information regarding a specific product please contact your local Taco representative. Taco reserves the right to make changes without prior notice.

### The BPHE concept

The Brazen Plate Heat Exchanger (BPHE) is constructed as a plate package of corrugated channel plates with a filler material between each plate. During the vacuum brazing process, the filler material forms a brazed joint at every contact point between the plates, creating complex channels. The BPHE allows media at different temperatures to come into close proximity, separated only by channel plates that enable heat from one media to be transferred to the other with very high efficiency. The concept is similar to other plate and frame technology, but without the gaskets and frame parts.

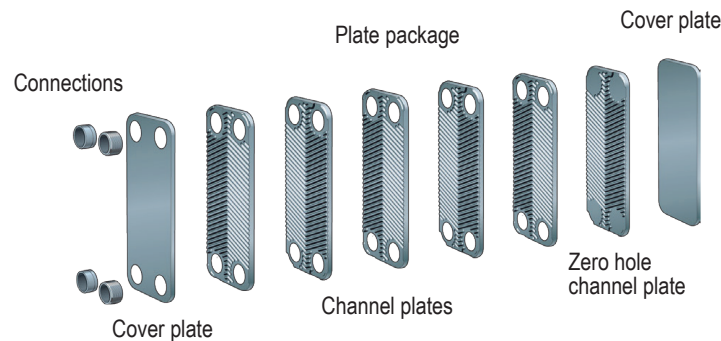

### Calculation Software

With Taco's unique Software Package, you can do advanced heat transfer calculations yourself, and choose the product solution that suits your application best. It's also easy to choose connections and generate drawings of the complete product. If you would like advice, or you would like to discuss different product solutions, Taco offers all the service and support your need.

### Material disclaimer

The information and recommendations in regards to the products are presented in good faith, however, Taco makes no representations or warranties as to the completeness or accuracy of the information. Information is supplied upon the condition that the purchasers will make their own determination as to the products' suitability for their purposes prior to use. Purchasers should note that the properties of the products are both application and material selection dependent and that products containing stainless steel are still subject to corrosion if used in unsuitable environments.

