

VR1816 ECM High-Efficiency Circulator

The 00e[®] series — VR1816 circulator is an infinitely variable speed, high-efficiency wet rotor circulator with an ECM permanent magnet motor. Operating modes include infinitely variable fixed speed and self-adjusting constant pressure or proportional pressure variable speed.

- High-efficiency ECM motor uses up to 85% less electricity
- Infinitely variable speed settings to fine tune flow for any system
- **SureStart**[®] automatic unblocking and air purging mode
- **BIO Barrier**[®] filter protects pump from system contaminants
- Dual electrical knock-outs and 6" stranded wire leads included for easy wiring



Features & Applications


Infinitely variable speed operation to fine tune flow for any system.



- 18" Shut-off head, 16 gpm max flow
- ECM High-efficiency motor
- Easy to use dial to set operating speed or pressure control
- Operates in 3 different modes:
 - Infinitely Variable Fixed Speed
 - Constant Pressure — Self-adjusting, Variable Speed
 - Proportional Pressure — Self-adjusting, Variable Speed
- 5 color LED displays:
 - Operating mode (Blue, Orange or Green)
 - Error code diagnostics (Red or White)
- Use with a Taco ZVC Zone Valve Control or SR Switching Relay for ON/OFF operation
- Integral Flow Check (IFC®) included
- Whisper quiet operation
- Optional 2-way flange reduces SKU's and provides universal fit-up to any flange position
- Double insulated, no ground required



Typical Applications

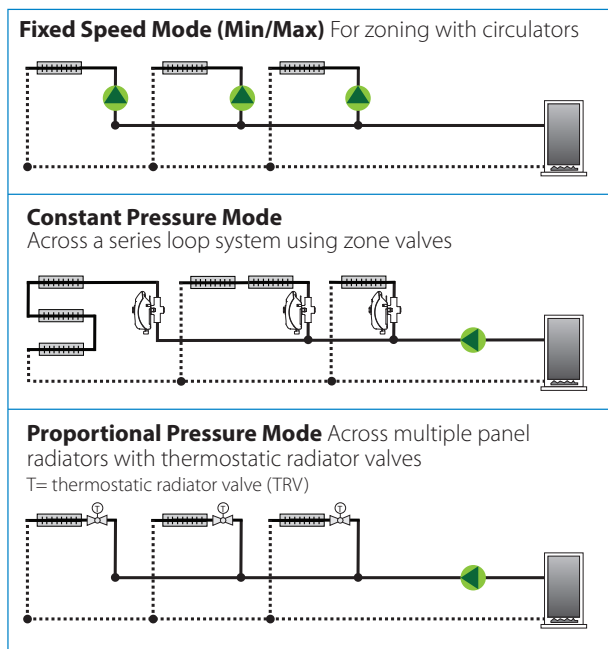

Replacement Chart (6-3/8" flange to flange dimension)

Taco	Grundfos	Armstrong	Xylem/B&G	Wilo
005	UP 15-10 F	Astro 230CI	ecocirc 19-14 auto	Star S 16F
006	UP 15-10 FR	Astro 230CI-R	ecocirc 19-14 vario	Star S 16FX
007	UP 15-42 F	Astro 250CI	NRF-22	Star S 21RFC
008	UP 15-42 FR	Astro 250CI-R	NRF-25	Star S 21FX
00R	UPS 15-42 F	Astro 20	NRF-9F/LW	Star S 21F
00R 3-Speed	UPS 15-58 FC	Astro 25		Stratos ECO 16 RFC
0015 3-Speed	UPS 15-58 FRC	Astro 30		
	ALPHA 15-55F	Astro 30-3		
	ALPHA 15-55FR	Astro 50-3		
		Compass 20-20		

Modes & Performance

FIXED SPEED MODE



CONSTANT PRESSURE MODE




PROPORTIONAL PRESSURE MODE



The VR1816 is factory-programmed for **Max Speed Setting**. Simply turn the dial to change speed, operating mode or pressure setting.

Fixed Speed Mode (Min/Max)

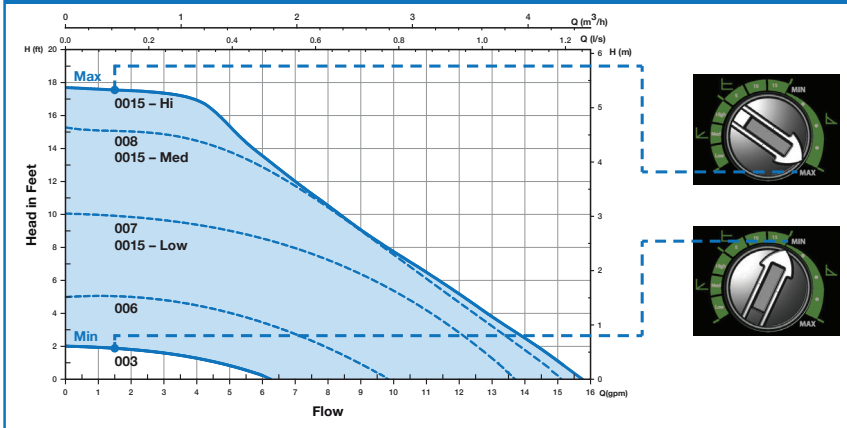


Fixed speed mode allows the installer to fine tune the circulator flow rate to precisely match design load conditions. It is infinitely variable between min/max settings.

Ideal for zoning with circulators.

See chart to the left for equivalent 00® model at each variable speed setting.



Constant Pressure Mode

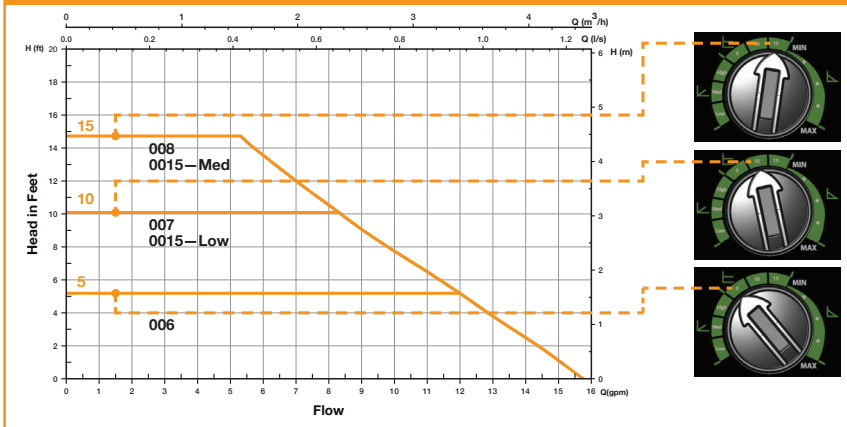


In constant pressure mode, the circulator maintains a constant pressure differential ($\Delta p-c$) in the system as heating load increases or decreases. Selection options are 5, 10, or 15 feet of head constant pressure.

Best option for zoning with zone valves.

See chart to the left for equivalent 00® model at each setting.



Proportional Pressure Mode

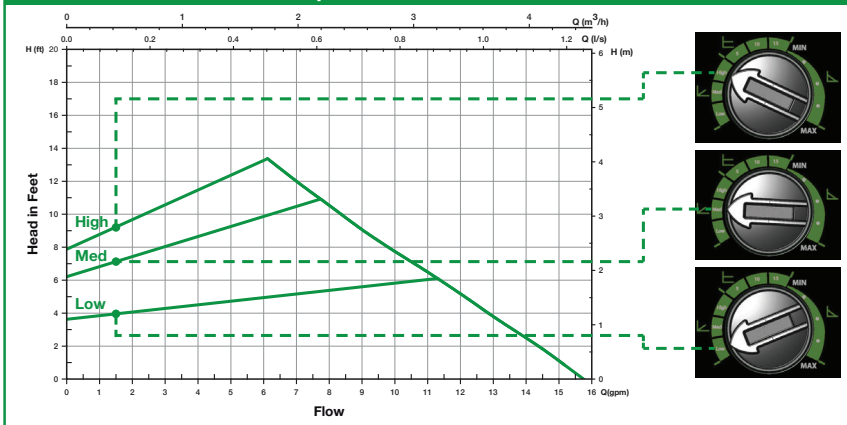

In proportional pressure mode, the circulator maintains a proportional pressure differential ($\Delta p-v$) in the system as heating load increases or decreases. Flow will change in relationship to the change in pressure differential.

Best option for panel radiators with thermostatic radiator valves (TRV).

Selection options are Low, Medium, or High. If unsure on proper setting, select Medium and adjust as needed.



Submittal Data Information Taco 00e® series — VR1816

Submittal Data # 101-167
Supersedes: 04/21/17

Effective: 05/30/17

Specifications


- Maximum Shut-off Head: 18 feet
- Maximum Flow: 16 gpm
- Maximum Operating Pressure: 125 psi (8.6 bar)
- Maximum Water Temp: 230°F (110°C)
- Minimum Water Temp: 36°F (2°C)
- Electrical specifications:
 - Voltage: 120V, 60 Hz
 - Single phase
 - Operating Power: 4W - 44W
 - Max. AMP Rating: 0.54
- Equipped with a cast iron casing and should be used for closed loop systems only
- Not suitable for chilled water or open loop potable water systems
- Taco circulator pumps are for indoor use only
- Acceptable for use with water or maximum of 50% water/glycol solution

Materials of Construction:

Casing:Cast Iron
 Stator Housing:Composite
 Cartridge:.....Composite
 Impeller:Composite
 Shaft:.....Ceramic
 Bearings:.....Carbon
 Thrust Bearing:.....Ceramic
 O-Ring & Gaskets:.....EPDM
 Integral Flow Check (IFC):
 Body, Plunger.....Acetal
 O-ring SealEPDM
 Spring.....Stainless Steel

Applications

The VR1816 circulator is a variable speed, high-efficiency wet rotor circulator with an ECM permanent magnet motor. Operating modes include infinitely variable fixed speed to fine tune any zone, self-adjusting constant pressure for zone valve applications and self-adjusting proportional pressure for panel radiators with thermostatic radiator valves. The VR1816 is not suitable for chilled water or open loop potable water systems.

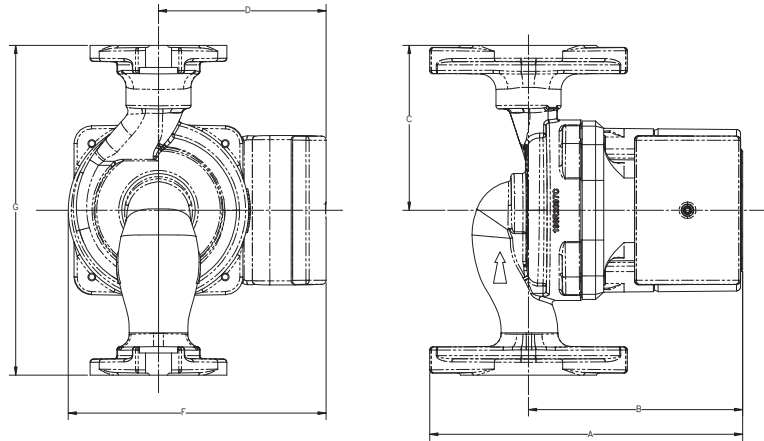


Pump Dimensions & Weights

Part Number	Flange Code	A		B		C		D		F		G		Ship Wt.	
		in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	lbs.	Kg
VR1816-HY2-FC2A00	S	6	152	4-1/8	104	3-3/16	80	3-1/4	82	5	126	6-3/8	161	5.8	2.6
VR1816-HY2-4C2A00	U	6	152	4-1/8	104	3-3/16	80	3-1/4	82	5-1/8	130	6-3/8	161	6	2.7

Mounting Positions



Flange Orientation



Standard (S)

Universal (U)

Electrical Data

Model	Volts	Hz	Ph	Max.Amps	Max. Watts	RPM
All Models	120	60	1	.54	44	1590 - 4830
Motor Type	ECM, Permanent Magnet, Thermally Protected					



Taco Inc., 1160 Cranston Street, Cranston, RI 02920 / (401) 942-8000 / Fax (401) 942-2360
 Taco (Canada) Ltd., 8450 Lawson Road, Unit #3, Milton, Ontario L9T 0J8 / (905) 564-9422 / Fax (905) 564-9436