

NAME:


REPRESENTATIVE:

UNIT TAG:

ENGINEER:

CONTRACTOR:

SUBMITTED BY:



Series e-1535 Stock Close-Coupled Centrifugal Pumps

FEATURES

- Bronze Fitted Construction
- Cast Iron Volute
- Bronze Impeller

TYPE OF SEAL

- Standard Seal
EPR/Carbon/Silicon Carbide
-10 to 250°F (-23 to 121°C)

WORKING PRESSURE

- 175 psi (12 bar) W.P.


SCHEDULE

MODEL NUMBER	PART NUMBER	VOLTAGE	PHASE	CYCLE	TAGGING INFORMATION	QUANTITY
e3501S	168300LF	115/230	1	60		
e3502S	168301LF	115/230	1	60		
e3503S	168302LF	115/230	1	60		
e3504S	168304LF	115/230	1	60		
e3505S	168306LF	115/230	1	60		
e3506S	168307LF	115/230	1	60		
e3507S	168309LF	115/230	1	60		
e3508S	168311LF	115/230	1	60		
e3509S	168313LF	115/230	1	60		
e3510S	168315LF	115/230	1	60		
e3511S	168317LF	115/230	1	60		
e3513S	168320LF	115/230	1	60		
e3514S	168322LF	115/230	1	60		
e3515S	168324LF	115/230	1	60		
e3517S	168327LF	115/230	1	60		
e3503T	168303LF	208-230/460	3	60		
e3504T	168305LF	208-230/460	3	60		
e3506T	168308LF	208-230/460	3	60		
e3507T	168310LF	208-230/460	3	60		
e3508T	168312LF	208-230/460	3	60		
e3509T	168314LF	208-230/460	3	60		
e3510T	168316LF	208-230/460	3	60		
e3511T	168318LF	208-230/460	3	60		
e3512T	168319LF	208-230/460	3	60		
e3513T	168321LF	208-230/460	3	60		
e3514T	168323LF	208-230/460	3	60		
e3515T	168325LF	208-230/460	3	60		
e3516T	168326LF	208-230/460	3	60		
e3517T	168328LF	208-230/460	3	60		

All single phase motors have built-in overload protection. Motors are Open Dripproof.

Model numbers ending in "S" are single phase

Model numbers ending in "T" are three phase

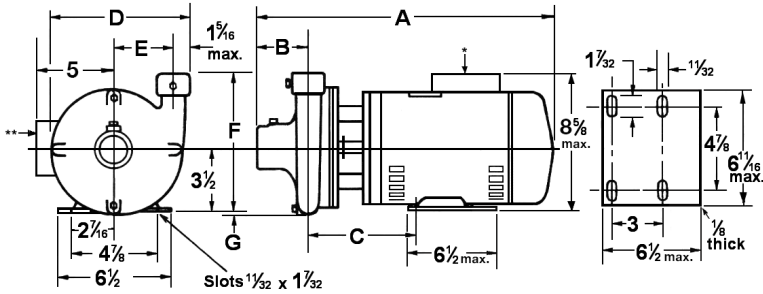

Model No.	Motor HP			DIMENSIONS IN INCHES (MM)*								
	HP/1800 RPM	HP/3600 RPM	Ph	Suction	Discharge	A (MAX.)	B	C	D	E	F	G
e3501S	1/4	-	1	1-1/4 (32)	3/4 (19)	14.75 (375)	3.19 (81)	5.31 (135)	6.88 (175)	3 (76)	7 (178)	-0.1 (-3)
e3502S	1/3	-	1	1-1/4 (32)	3/4 (19)	14 (356)	3.19 (81)	5.31 (135)	6.88 (175)	3 (76)	7 (203)	-0.1 (-3)
e3503S	-	1 1/2	1	1-1/4 (32)	3/4 (19)	15.25 (387)	3.19 (81)	5.31 (135)	6.88 (175)	3 (76)	7 (178)	-0.1 (-3)
e3503T	-	1 1/2	3	1-1/4 (32)	3/4 (25)	15.75 (400)	3.19 (81)	5.31 (135)	6.88 (175)	3 (76)	7 (178)	-0.1 (-3)
e3517S	-	2	1	1-1/4 (32)	3/4 (19)	16.25 (413)	3.19 (81)	5.31 (135)	6.88 (175)	3 (76)	7 (175)	-0.1 (-3)
e3517T	-	2	3	1-1/4 (32)	3/4 (19)	16.25 (413)	3.19 (81)	5.31 (135)	6.88 (175)	3 (76)	7 (178)	-0.1 (-3)
e3504S	-	3	1	1-1/4 (32)	3/4 (19)	16.75 (425)	3.19 (81)	5.31 (135)	6.88 (175)	3 (76)	7 (178)	-0.1 (-3)
e3504T	-	3	3	1-1/4 (32)	3/4 (19)	17.25 (438)	3.19 (81)	5.31 (135)	6.88 (175)	3 (76)	7 (175)	-0.1 (-3)
e3505S	1/3	-	1	1-1/4 (32)	1 (25)	14 (356)	3.19 (81)	5.31 (135)	6.88 (175)	3 (76)	7 (203)	0.25 (6)
e3506S	1/2	-	1	1-1/4 (32)	1 (25)	14.25 (362)	3.19 (81)	5.31 (135)	6.88 (175)	3 (76)	7 (178)	0.25 (6)
e3506T	1/2	-	3	1-1/4 (32)	1 (25)	15.31 (389)	3.19 (81)	5.31 (135)	6.88 (175)	3 (76)	7 (178)	0.25 (6)
e3507S	-	2	1	1-1/4 (32)	1 (25)	16.25 (413)	3.19 (81)	5.31 (135)	6.88 (175)	3 (76)	7 (175)	0.25 (6)
e3507T	-	2	3	1-1/4 (32)	1 (25)	16.25 (413)	3.19 (81)	5.31 (135)	6.88 (175)	3 (76)	7 (178)	0.25 (6)
e3508S	-	3	1	1-1/4 (32)	1 (25)	16.75 (425)	3.19 (81)	5.31 (135)	6.88 (175)	3 (76)	7 (178)	0.25 (6)
e3508T	-	3	3	1-1/4 (32)	1 (25)	17.25 (438)	3.19 (81)	5.31 (135)	6.88 (175)	3 (76)	7 (175)	0.25 (6)
e3509S	1/2	-	1	1-1/2 (38)	1-1/4 (32)	14.25 (362)	3.19 (81)	5.31 (135)	6.88 (175)	3 (76)	7 (178)	0.35 (9)
e3509T	1/2	-	3	1-1/2 (38)	1-1/4 (32)	15.31 (389)	3.19 (81)	5.31 (135)	6.88 (175)	3 (76)	7 (178)	0.35 (9)
e3510S	3/4	-	1	1-1/2 (38)	1-1/4 (32)	14.69 (373)	2-15/16 (75)	5-5/16 (135)	8 (203)	3-3/8 (86)	8 (203)	0.35 (9)
e3510T	3/4	-	3	1-1/2 (38)	1-1/4 (32)	15.81 (402)	3.19 (81)	5.31 (135)	6.88 (175)	3 (76)	7 (175)	0.35 (9)
e3511S	-	3	1	1-1/2 (38)	1-1/4 (32)	16.75 (425)	3.19 (81)	5.31 (135)	6.88 (175)	3 (76)	7 (178)	0.35 (9)
e3511T	-	3	3	1-1/2 (38)	1-1/4 (32)	16.75 (425)	3.19 (81)	5.31 (135)	6.88 (175)	3 (76)	7 (175)	0.35 (9)
e3512T	-	5	3	1-1/2 (38)	1-1/4 (32)	20.31 (516)	3.19 (81)	5.31 (135)	6.88 (175)	3 (76)	7 (175)	0.35 (9)
e3513S	1/2	-	1	2 (51)	1-1/2 (38)	14.25 (362)	3.19 (81)	5.31 (135)	6.88 (175)	3 (76)	7 (178)	0.5 (13)
e3513T	1/2	-	3	2 (51)	1-1/2 (38)	15.31 (389)	3.19 (81)	5.31 (135)	6.88 (175)	3 (76)	7 (178)	0.5 (13)
e3514S	3/4	-	1	2 (51)	1-1/2 (38)	15.75 (400)	3.19 (81)	5.31 (135)	6.88 (175)	3 (76)	7 (178)	0.5 (13)
e3514T	3/4	-	3	2 (51)	1-1/2 (38)	15.81 (402)	3.19 (81)	5.31 (135)	6.88 (175)	3 (76)	7 (178)	0.5 (13)
e3515S	-	3	1	2 (51)	1-1/2 (38)	16.75 (425)	3.19 (81)	5.31 (135)	6.88 (175)	3 (76)	7 (178)	0.5 (13)
e3515T	-	3	3	2 (51)	1-1/2 (38)	17.25 (438)	3.19 (81)	5.31 (135)	6.88 (175)	3 (76)	7 (175)	0.5 (13)
e3516T	-	5	3	2 (51)	1-1/2 (38)	15.81 (402)	3.19 (81)	5.31 (135)	6.88 (175)	3 (76)	7 (178)	0.5 (13)

*Dimensions are subject to change. Not to be used for construction purposes unless certified.

